



ML500G Advanced 4G Asset GNSS Tracker

The MiCODUS ML500G asset tracker is designed specially for easy installation and long battery life demand. Its backup 5000mAh large and rechargeable battery allows the product to operate for around 10 days if providing location updates in ten-minute intervals. With 6pcs built-in powerful magnets it can be installed on metal surface easily.


Besides, ML500G also has many useful features for fleet management and security monitoring.



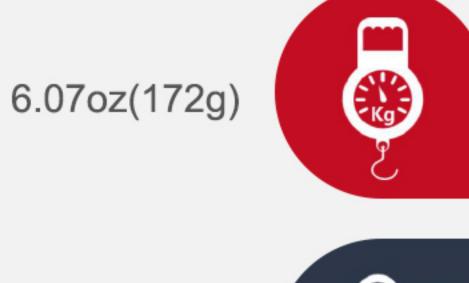



85(L) x 49(W) x 30(H)mm

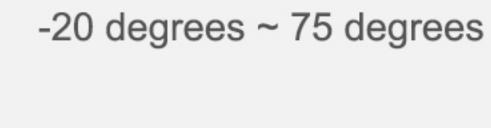

4G & 2G

5000mAh Backup Battery

Temperature Monitor

Tearndown Alarm

Movement Alarm









REGION



CERTIFICATES

CE, FCC, RoHS


OPERATION BANDS


4G LTE FDD: B1/B2/B3/B4/B5/B7/B8/B28/B66


2G GSM/GPRS/EDGE: 850/900/1800/1900MHz

POSITION ACCURACY


GNSS Accuracy: <5 meters

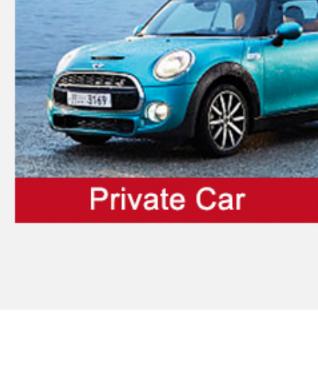


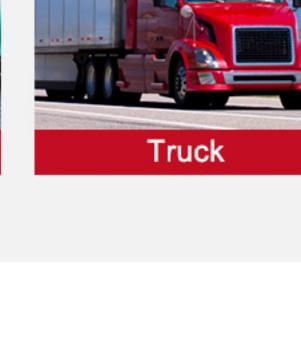


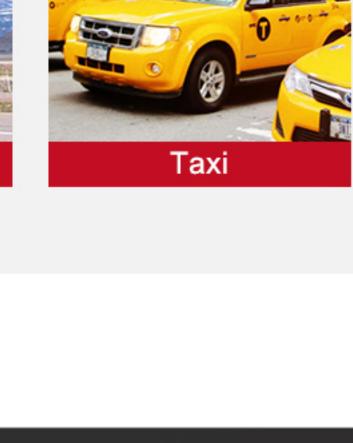


Applications

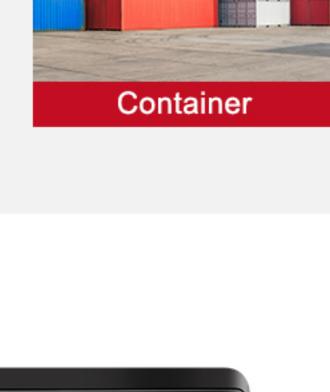

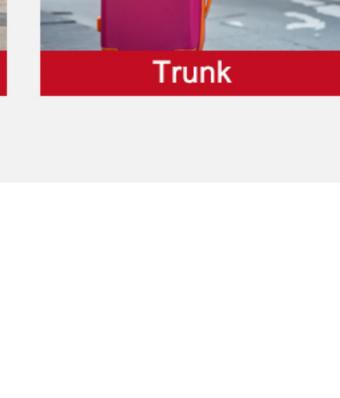

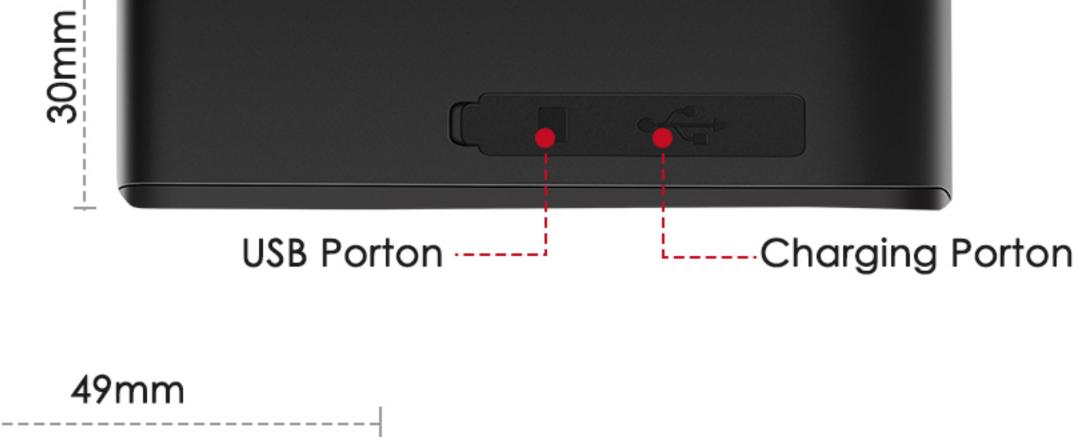

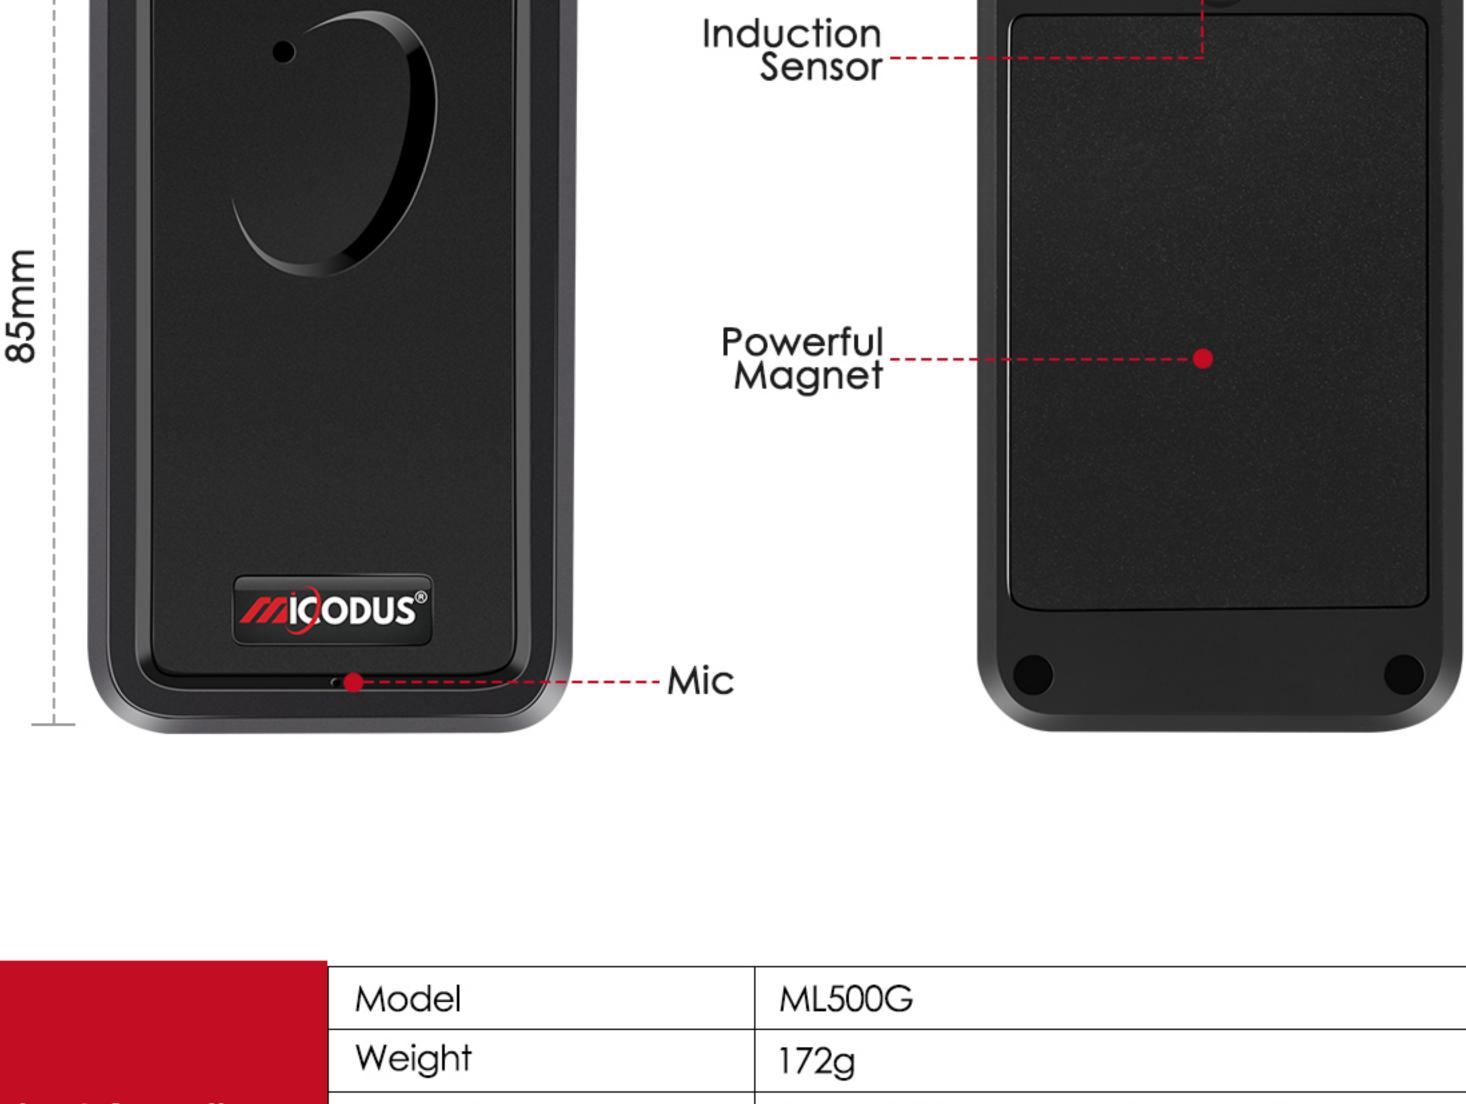

Device Information	Weight	172g
	Dimensions	85mm(L) * 49mm(W) * 30mm(H)
	Charging Time	Around 7 hours
	Battery Working Time	Tracking Mode, 1 minutes' reporting: 10 days
Working Parameters	Working Voltage	DC 3.4V - 4.5V
	Working Current	4V/Average 45mA
	Sleep Current	4V/less than 5mA
	Battery Capacity	3.7V 5000mAh Lion Polymer battery
	Working Temperature	-20℃ - 75℃
	Working Humidity	10%-85%RH non-condensing
GSM Specifications	Working Frequency	4G LTE+2G GSM
	SIM Card	Micro SIM Card
	GSM Antenna	Built-in
GPS Specifications	Positioning Type	GPS+BEIDOU+LBS
	GPS Antenna	Built-in
	Cold Start	≤32 Seconds
	Hot Start	≤1 Second
	Tracking sensitivity	-162 dBm
	GPS Channels	64
	Position Accuracy	5-10m
Temperature Sensor	Scope	40°C to 125°C
	Accuracy	±1°C
External Interface	Microphone, Light Sensor, Temperature Sensor	