

4G LTE Cat 1 Relay Vehicle GNSS Tracker



MV730G is a 4G vehicle tracker with compact size and relay shape camouflage design, it is a discreetly-installed, fully-featured tracker with 4G LTE & 2G GSM, GNSS, 4G LTE communication with GSM (2G) fallback ensures a solid connection in almost all cases, and the wide 9-95V input voltage range is compatible with virtually any vehicle. It is a perfect tracker for a wide range of use cases – stolen vehicle recovery and the management of motorcycles, passenger cars, and light commercial vehicles.

- 1.41oz(40g)
- 72x30x34mm
- 20°C-60°C
- Built-in 80mAh Lithium Battery


- 4G LTE+2G GSM
- Real-time Tracking
- Historical Route Playback
- GNSS+LBS
- Remotely Cut Off/Resume Fuel
- 9-95V Wide Working Voltage
- ACC Status Detection
- Overspeed Alarm
- Vibration alarm
- Geo-fence
- Auto Arm by ACC
- Shift Alarm
- Power Disconnect Alarm
- Engine On/OFF Alarm

| | |
|--|--|
| REGION Worldwide | OPERATION BANDS 2G GSM/GPRS: 850/900/1800/1900MHz 4G LTE CAT1: B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28/B66/B34/B38/B39/B40/B41 |
| POSITION ACCURACY GNSS Accuracy: <5 meters | CERTIFICATES CE, RoHS |


Applications

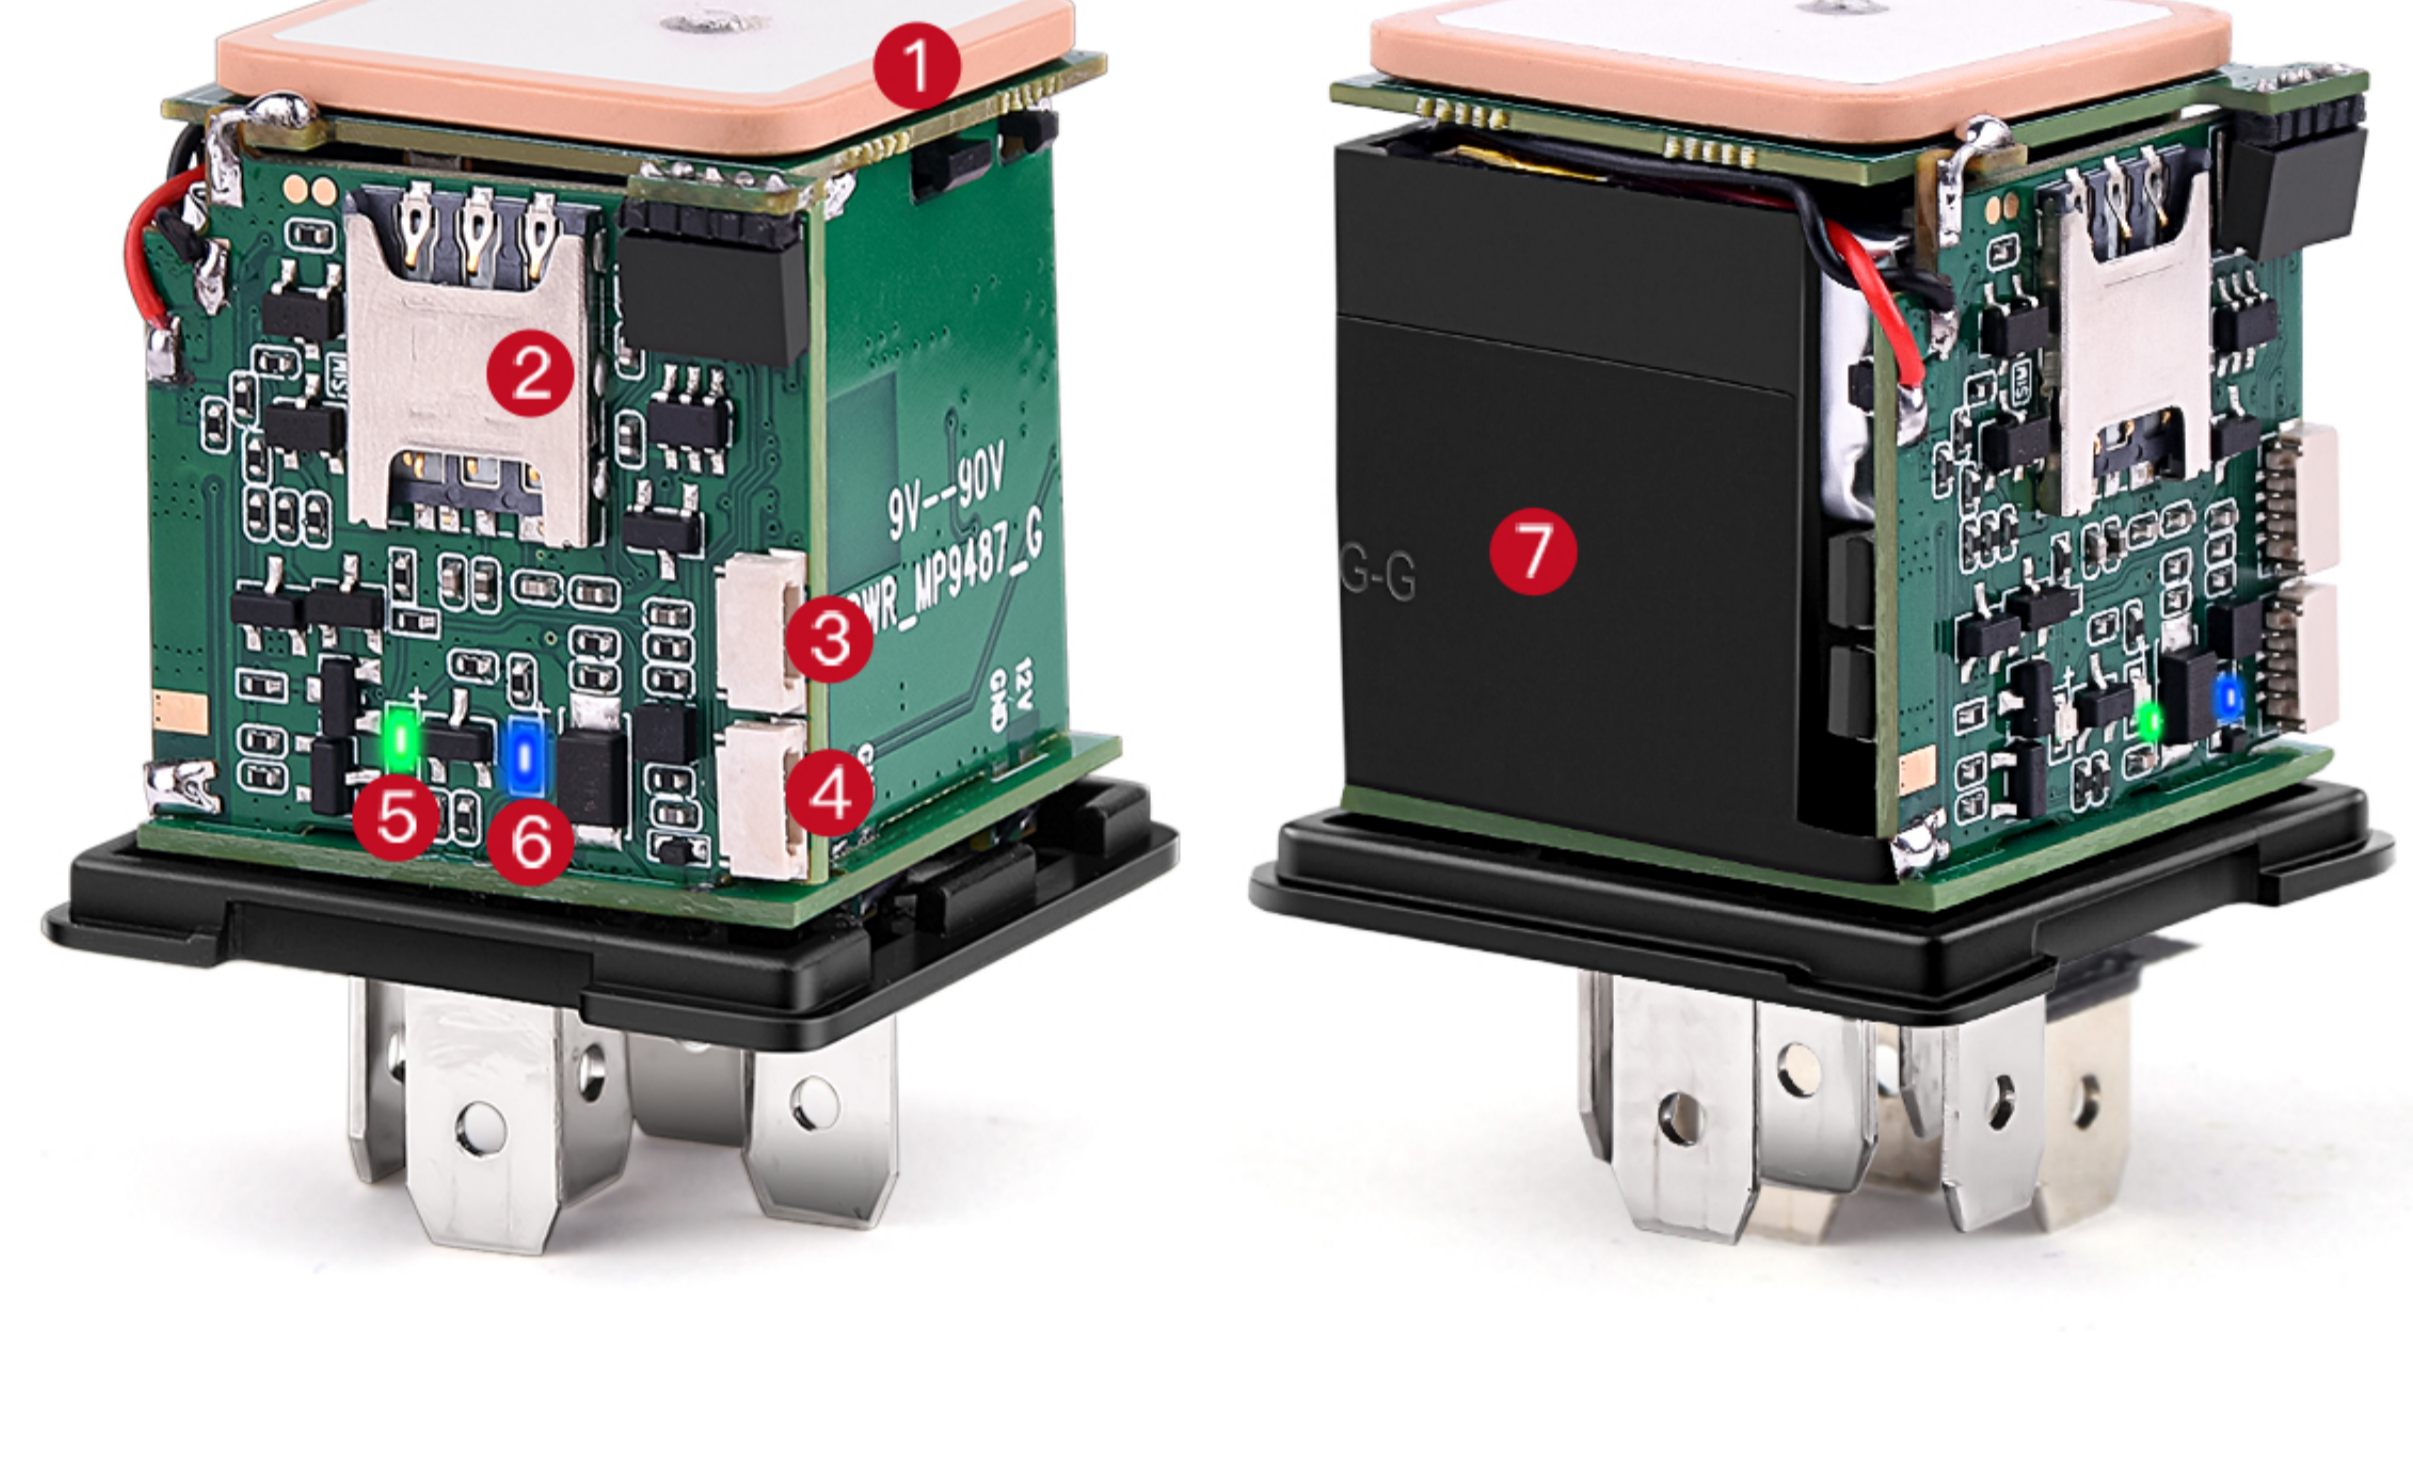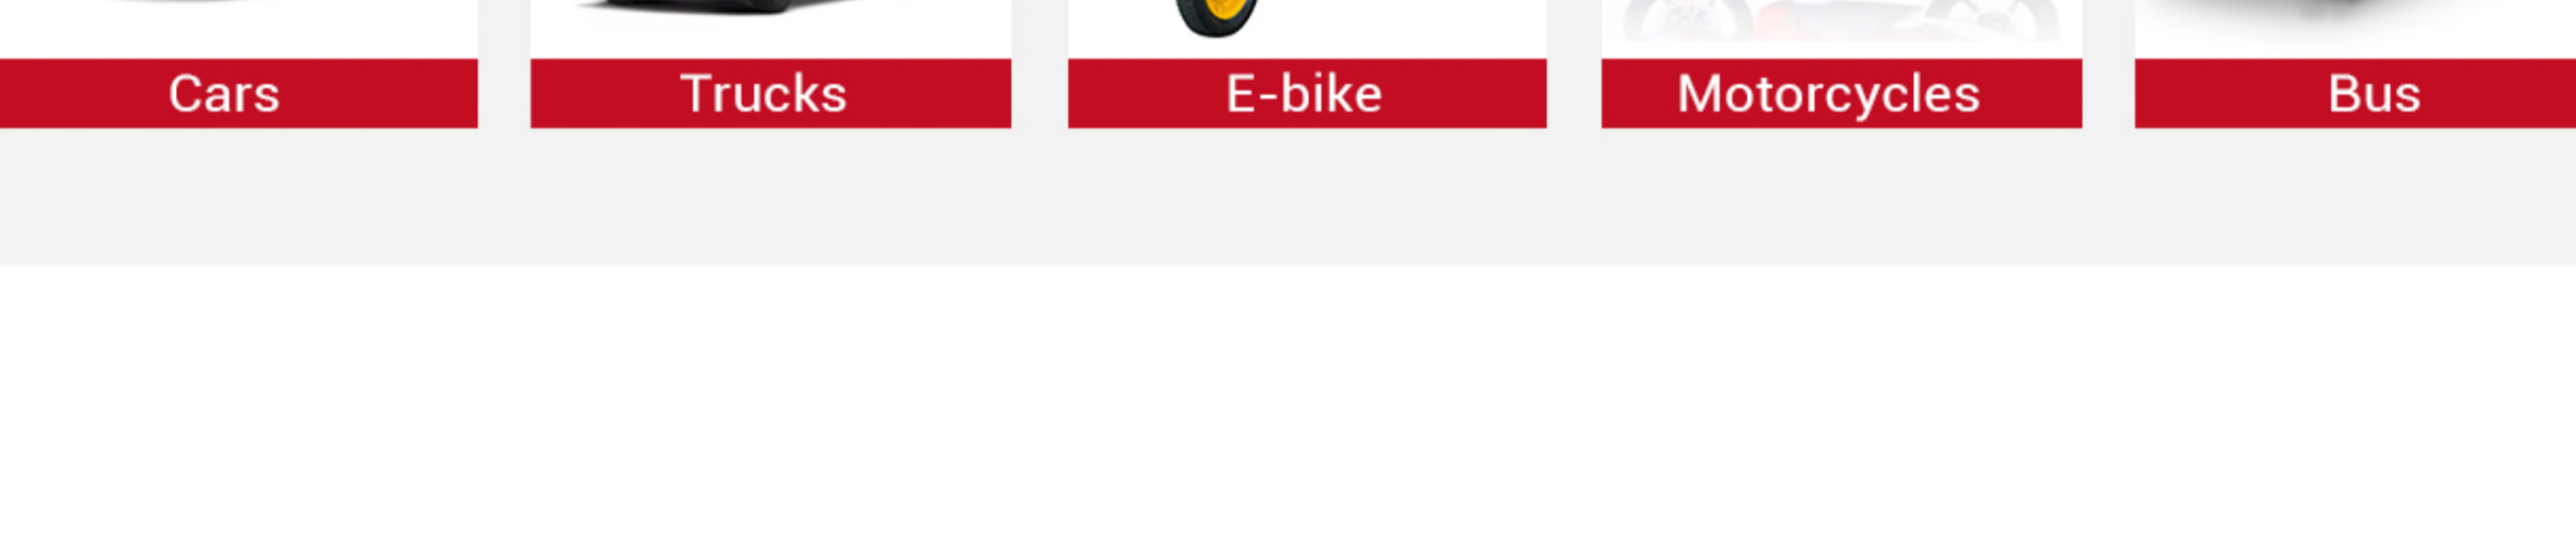

- 1 GPS Antenna
- 2 Nano SIM Card Slot
- 3 USB Port for Testing
- 4 Serial Port for Testing / IMEI Changing
- 5 Cellular Led Indicator
- 6 GNSS Led Indicator
- 7 Cellular Antenna

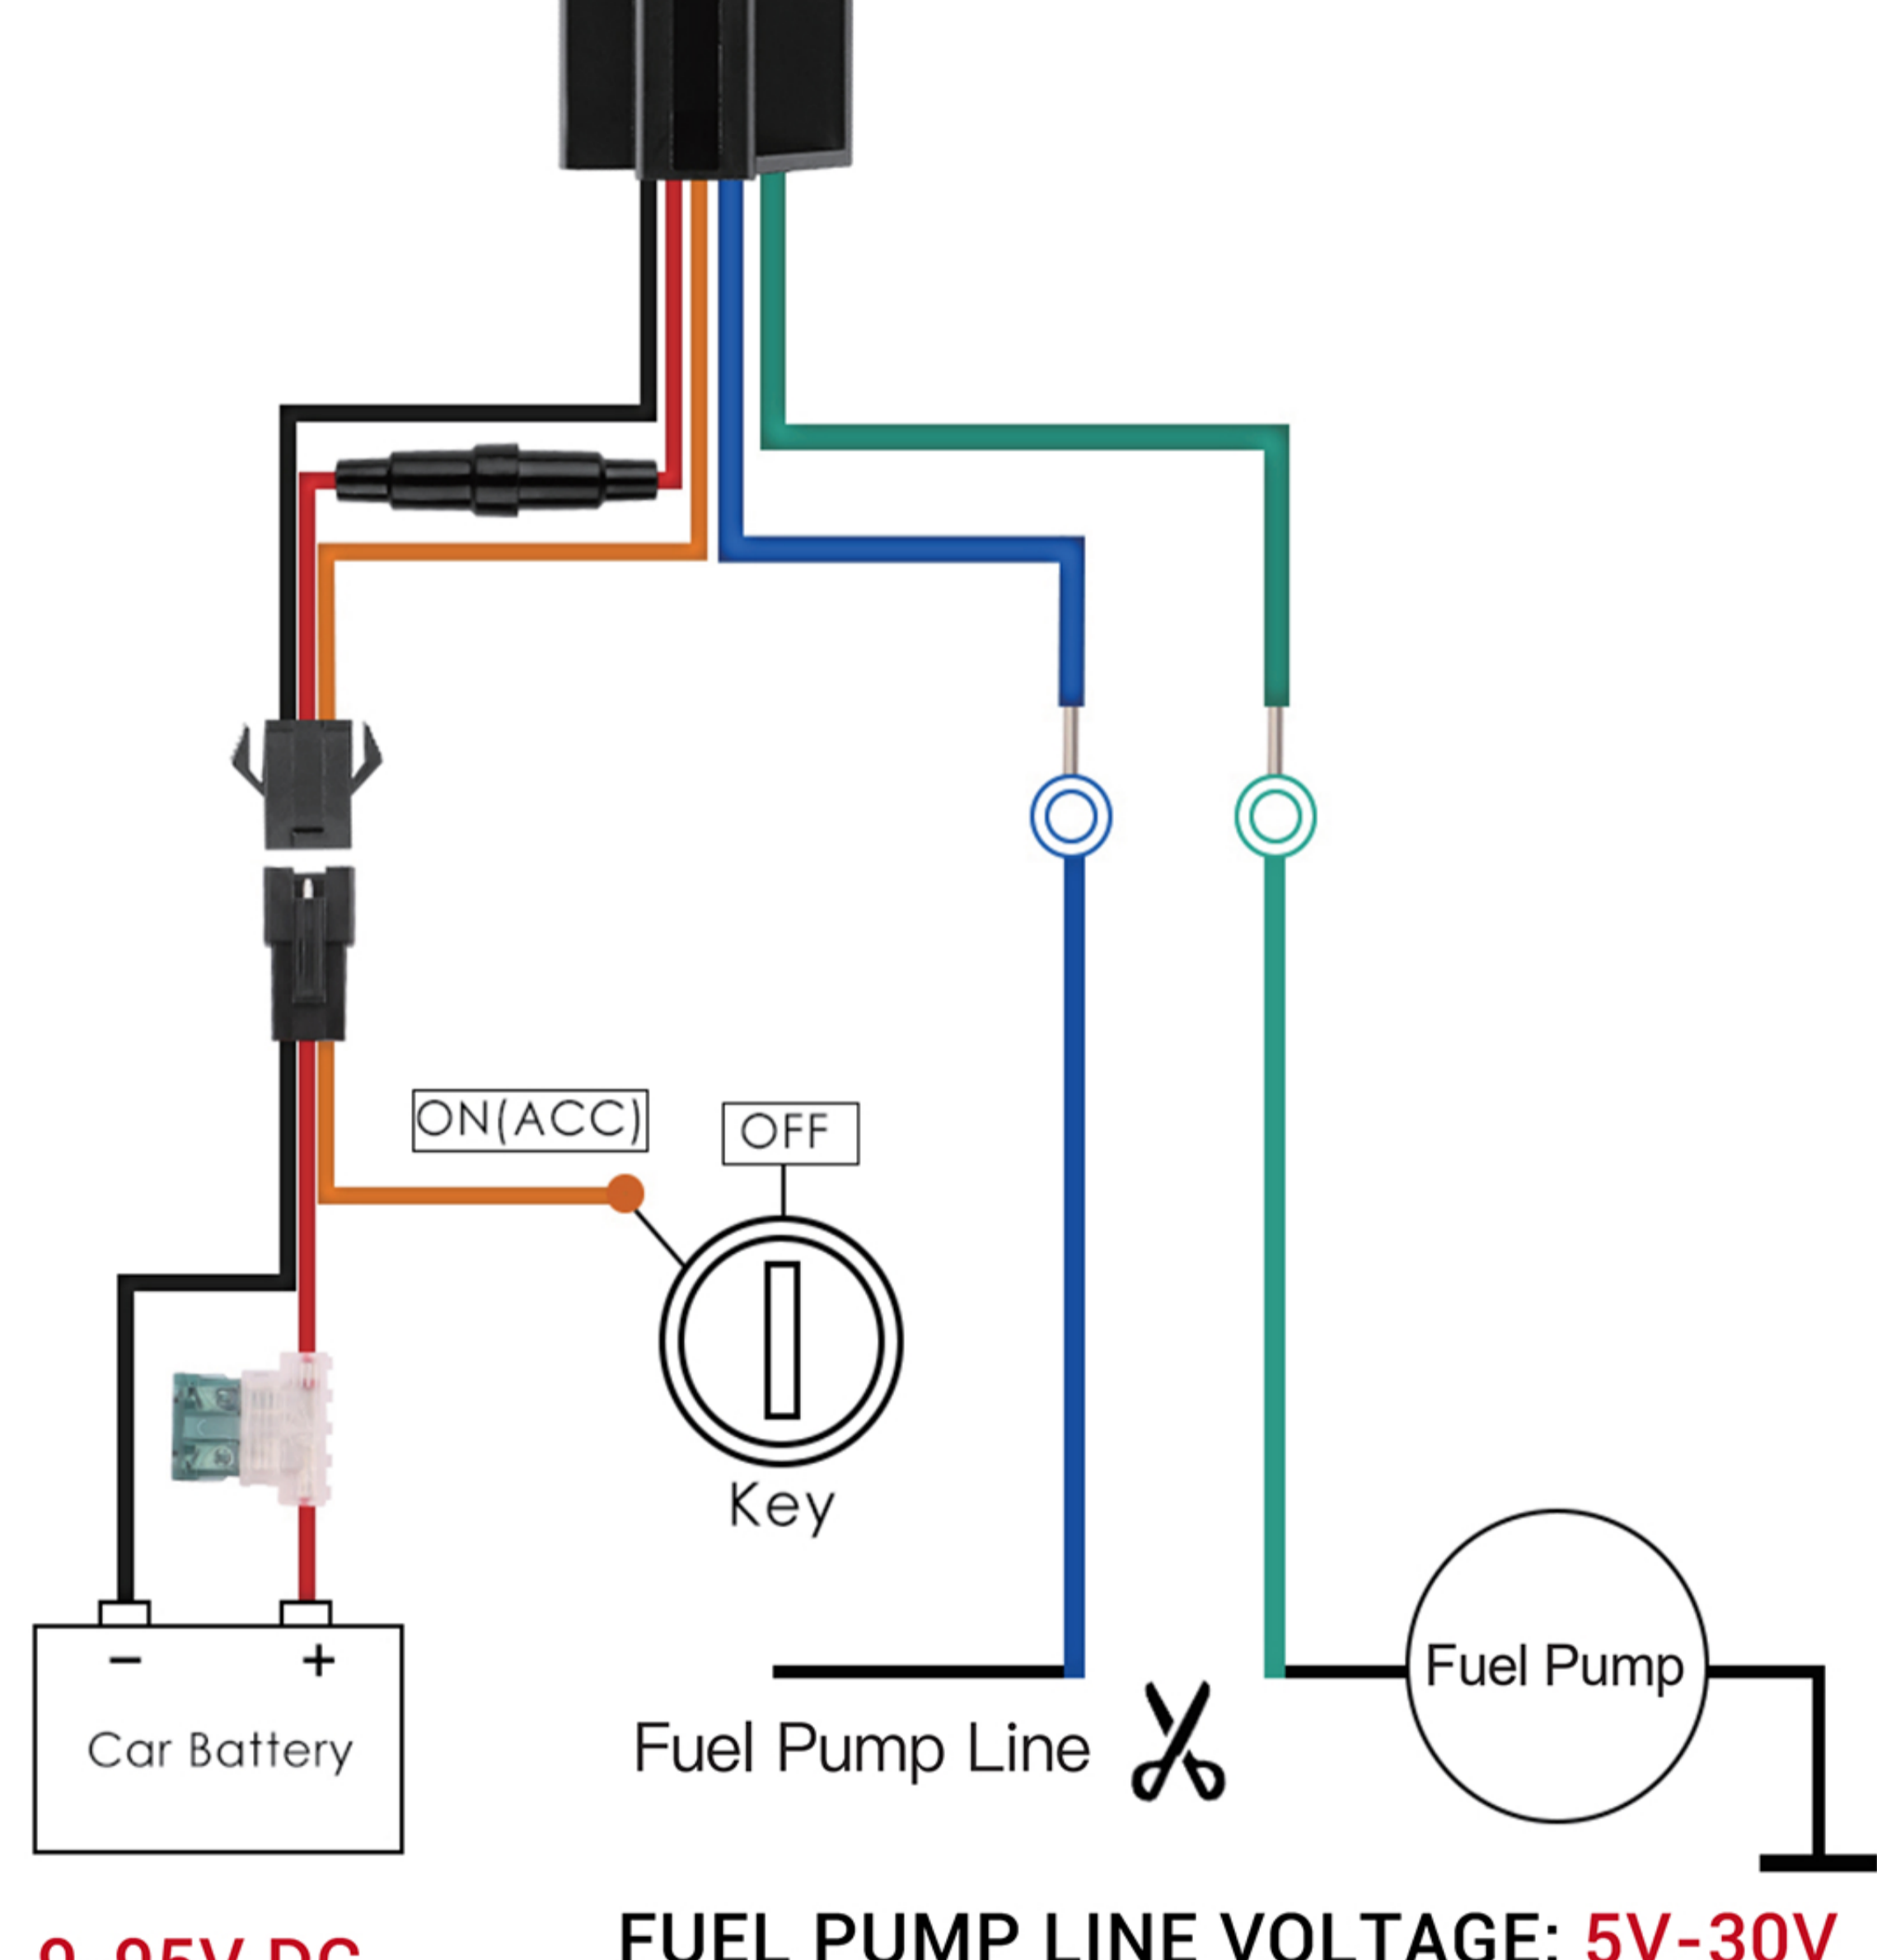

9-95V DC **FUEL PUMP LINE VOLTAGE: 5V-30V**
FUEL PUMP LINE CURRENT: < 60A

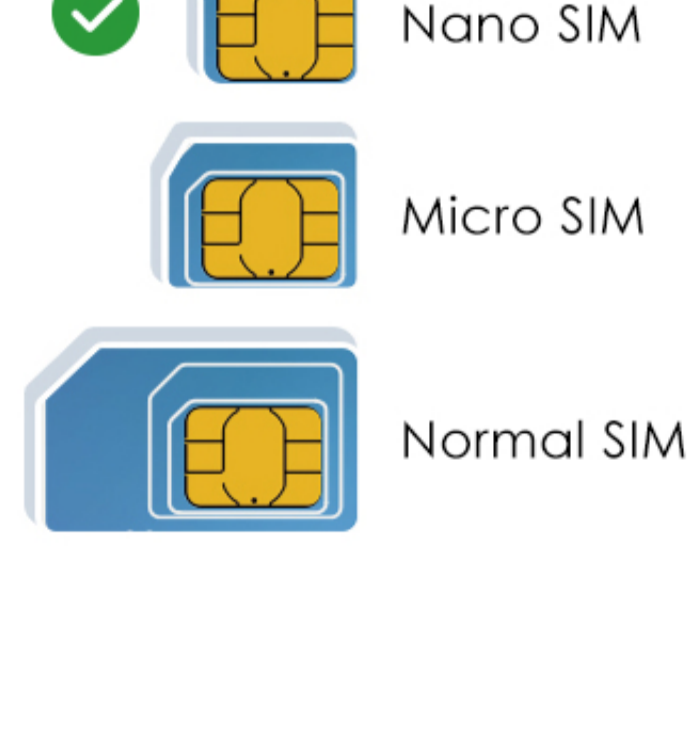

TIPS:
 (1) Please remove the PIN code;
 (2) Please enable the internet DATA traffic, Caller ID and SMS service of the SIM;
 (3) Please ensure enough balance left for SIM card monthly fee;
 (4) Please contact us with SIM operator if the device isn't online automatically.

Product Specification

| | | |
|-------------------------|--|---|
| Device Information | Model | MV730G |
| | Weight | 40G |
| | Dimensions | 72 x 30 x 34mm |
| | Battery | Built-in 80mAh Lithium Battery |
| Working Parameters | Working Voltage | 9-95V DC |
| | Fuel Pump Power Line Voltage | 5-30V DC |
| | Fuel Pump Power Line Current | Max 60 amps (Normally 20 amps) |
| | Working Power | Working Power: 1.2w; Sleep Power: 0.025w |
| | Working Temperature | -20C - 60C |
| | Working Humidity | 5%-95%RH |
| Cellular Specifications | SIM Card | Nano Size |
| | Cellular Antenna | Built-in |
| | Working Frequency | 2G GSM/GPRS: 850/900/1800/1900MHz 4G LTE CAT1: 1/2/3/4/5/7/8/12/13/18/19/20/25/26/28/66/34/38/39/40/41 |
| GNSS Specifications | GNSS | GPS+GLONASS+BDS+GALILEO+QZSS+SBA (WAAS, EGNOS, GAGAN, MSAS) |
| | Hot/warm/cold Start | <3s,<35s,<45s@Open Sky |
| | GNSS Antenna | Built-in Ceramics GNSS Antenna |
| | Positioning Type | GNSS+LBS+AGPS |
| Main Features | Accuracy | GNSS Accuracy: <5M @ Open Sky LBS Accuracy: 200-2000m (Depend on density of base stations) |
| | 4G+2G, Cut Off/Resume Fuel Remotely, Engine Start Alarm, Tow Alarm, Vibration Alarm, Geofence etc. | |