



ML300G 2500mAh 4G Asset GNSS Tracker


ML300G is a 4G CAT 1 asset GNSS tracker which is designed for vehicle & asset tracking, it supports GPS/GLONASS/BDS/LBS positioning, it also has 2500mAh backup battery, extremely thin design, built-in magnet, light sensor and microphone etc. What's more, it supports multiple alerts for abnormal vibration, low battery, movement, overspeed, Geo-fence etc. With our MiCODUS cloud platform and mobile APP, ML300G is ideal for remote monitoring of users' targets, and it's also suitable for such application scenarios as vehicle rental, fleet management, logistics transportation, etc.

4.65oz(132g)



78(L) x 53(W) x 14(H)mm

-20°C-75°C

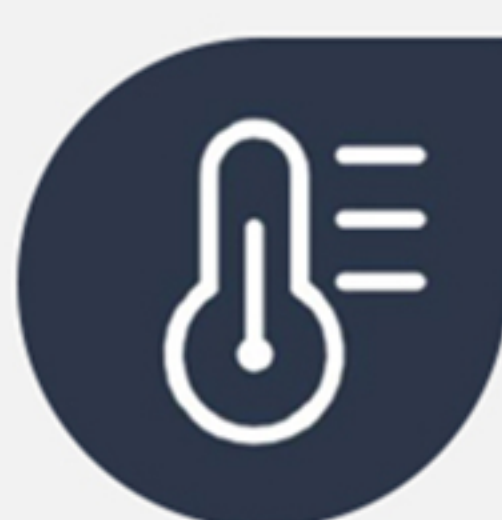

3.7V 2500mAh
Li-Polymer Battery



4G LTE+2G GSM



Real-time Tracking



Historical Route Playback



Type-C



Waterproof IP65



2500mAh



Voice Monitor



Overspeed Alarm



Vibration alarm



Geo-fence



Movement Alarm



Data Logger

REGION

Worldwide

OPERATION BANDS

4G LTE CAT1: B1/B2/B3/B4/B5/B7/B8/B28/B66
2G GSM/GPRS: 850/900/1800/1900MHz

POSITION ACCURACY

GNSS Accuracy: <5 meters


CERTIFICATES

CE, RoHS

Applications



Truck

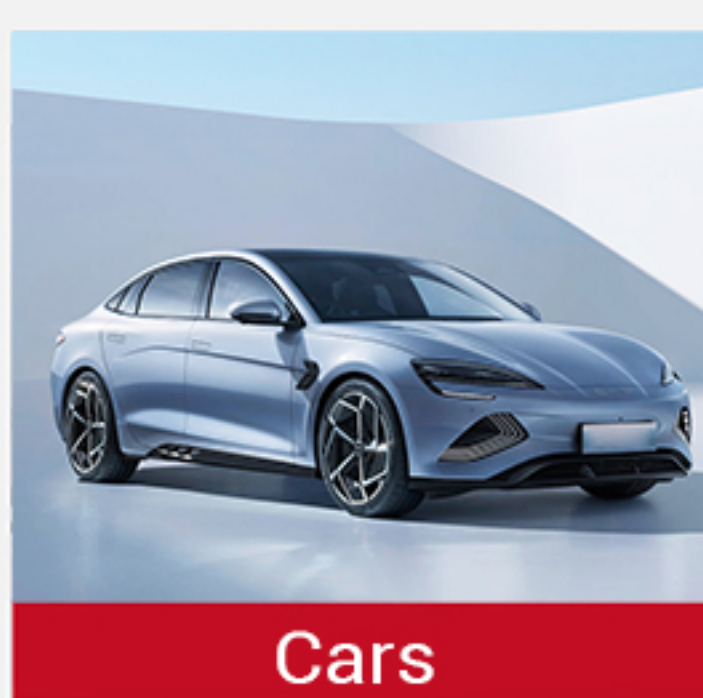

Cars




Safes



Valuables



Trunk

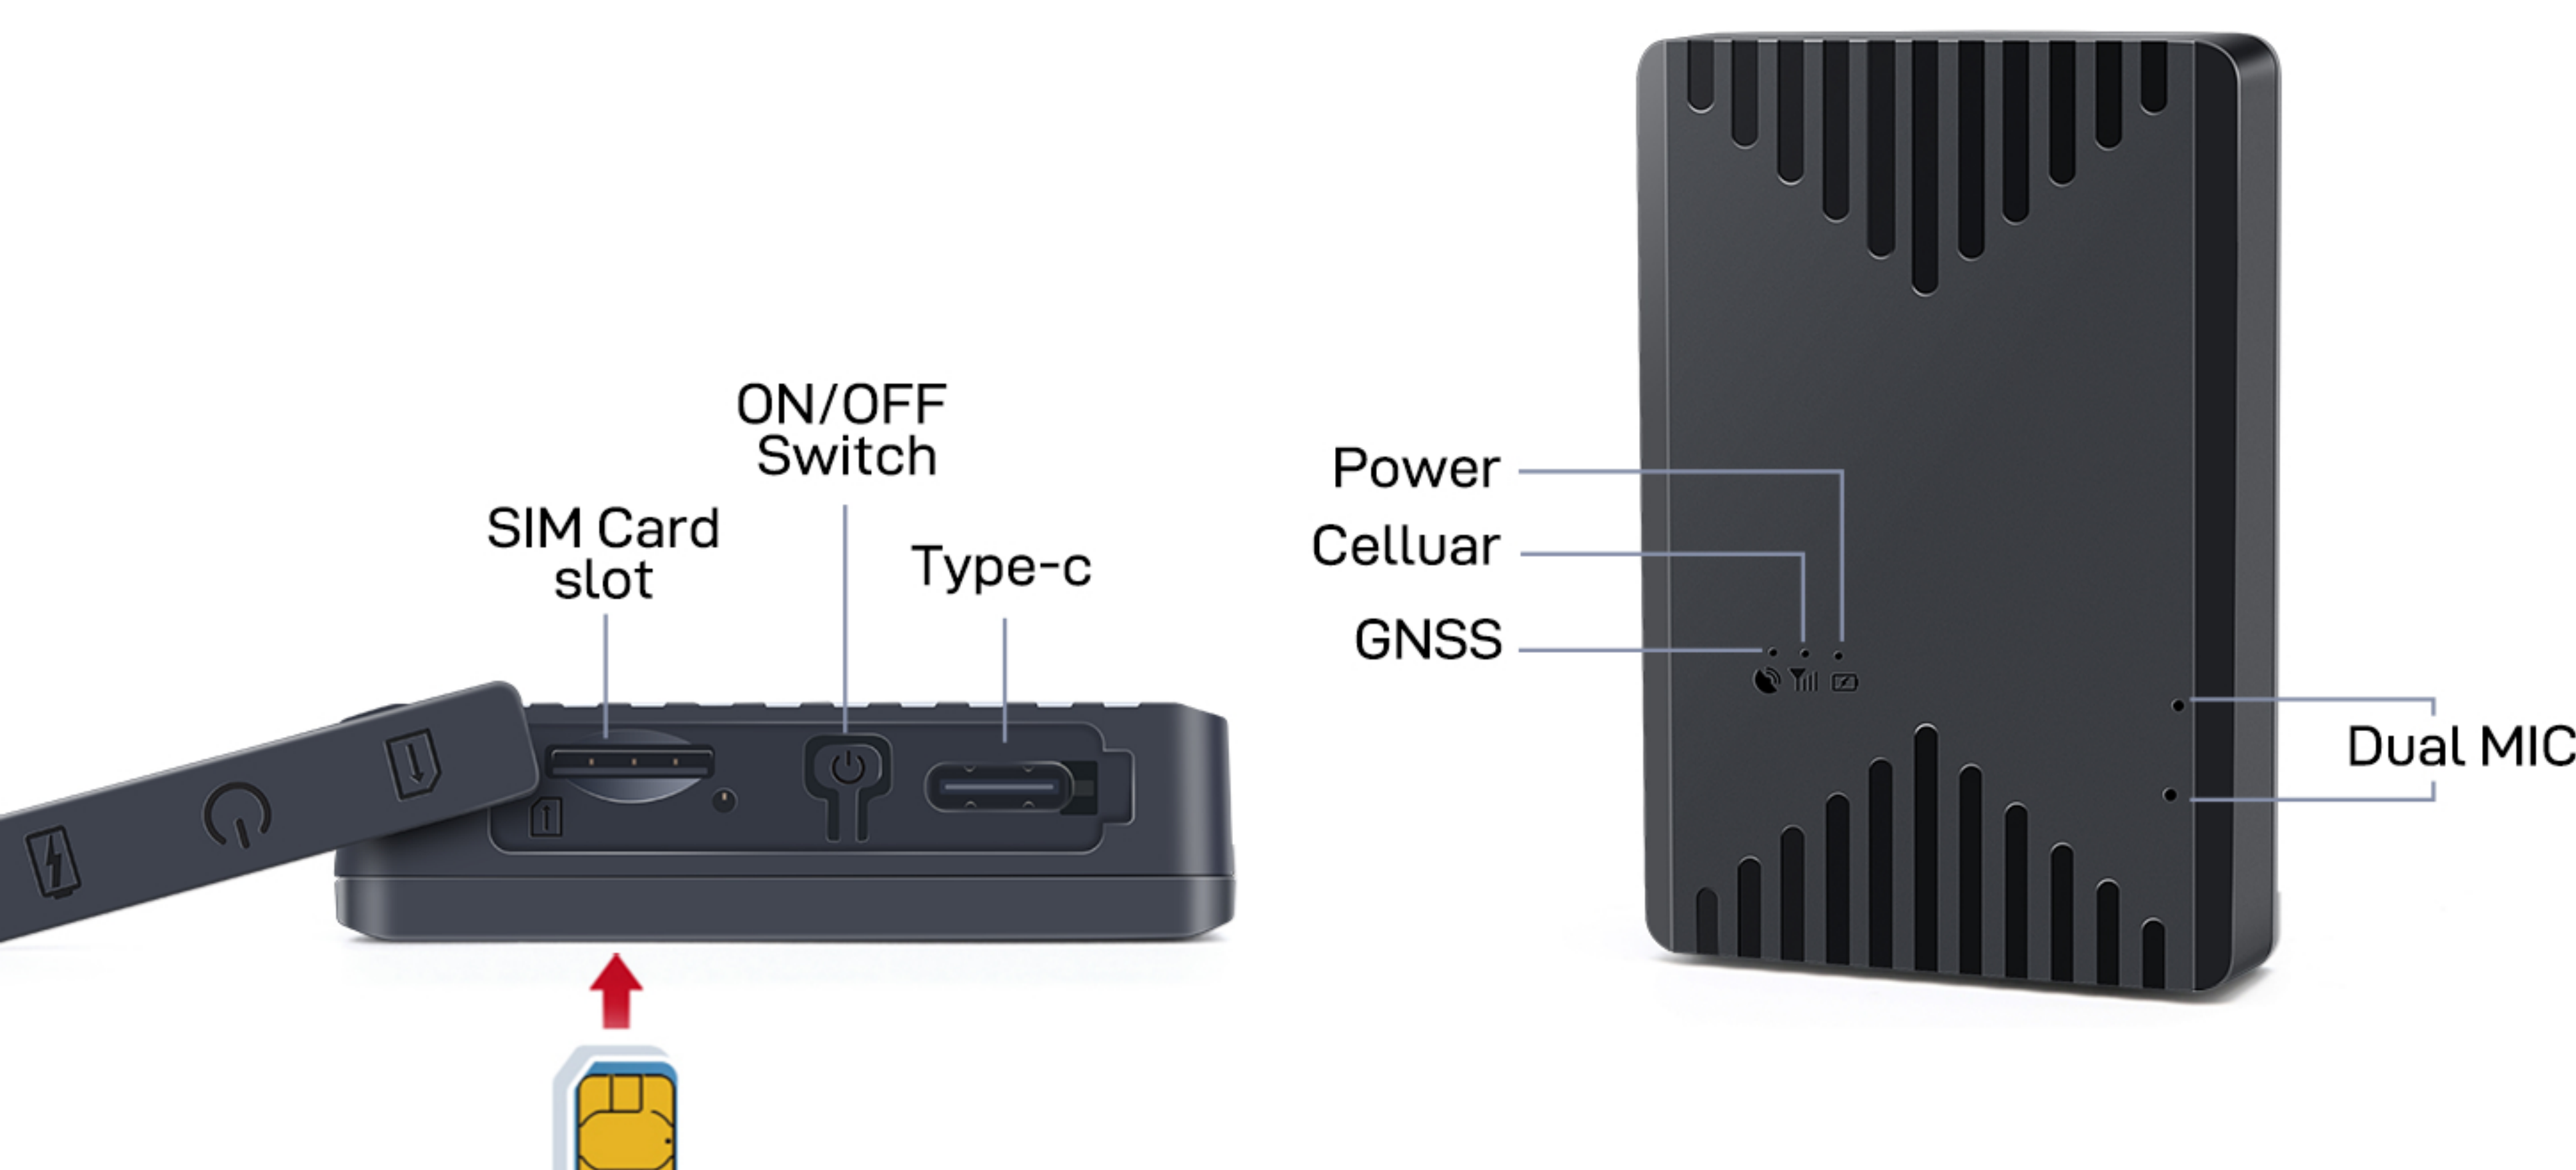

Normal SIM



Micro SIM



Nano SIM

TIPS:

- (1) Please remove the PIN code;
- (2) Please enable the internet DATA traffic, Caller ID and SMS service of the SIM;
- (3) Please ensure enough balance left for SIM card monthly fee;
- (4) Please contact us with SIM operator if the device isn't online automatically.

Device Information	Model	ML300G
	Weight	132g
	Dimensions	78mm(L)*53mm(W)*14mm(H)
	Battery	3.7V 2500mAh Li-Polymer Battery
	Working Voltage	DC 3.4V - 4.5V
	Working Current	4V/Average 55mA
	Sleep Current	4V/Average 6mA
	Waterproof Level	IP65
Working Parameters	Battery Life	Real-time Tracking mode: around 4-6 days; Power Saving Mode: around 7-10 days; Hibernate Mode: around 15-20 days
	Working Temperature	-20°C~ 75°C
	Working Humidity	10%-85%RH
Cellular Specifications	SIM Card	Nano SIM
	Cellular Antenna	Built-in FPC Antenna
	Working Frequency	4G LTE CAT1: B1/B2/B3/B4/B5/B7/B8/B28/B66 2G GSM/GPRS: 850/900/1800/1900MHz
	GNSS	GPS+BDS
	GPS Frequency	L1: 1575.42±1.023MHz
	BDS Frequency	B1: 1561.098±2.046MHz
	Dimension of Antenna	18mm*18mm*2mm
GNSS Specifications	Satellite Channels	32
	Tracking Sensitivity	-162dBm
	Hot/Cold Start	<2s, <32s @ Open Sky
	GNSS Antenna	Built-in Ceramics GNSS Antenna
	Positioning Type	GNSS+LBS+AGPS
	Positioning Accuracy	GNSS Accuracy: <5M @ Open Sky
		LBS Accuracy: 100-2000m (Depend on density of base stations)
Main Features	4G+2G, Realtime Tracking, Vibration Alarm, Shift Alarm, Voice Monitor, Built-in Magnet, Light Sensor, Type-C Charge etc	